

268 Series

Surface Skimmer

Function:

The **268 Series Front Access Surface Skimmer** is used to remove film and debris from the fountain's water surface by drawing the water to the skimmer and collecting the debris inside a removable basket in the face of the skimmer. A flow of 10 to 30 GPM (5 GPM minimum) is required to draw the water appropriately.

The removable basket should be cleaned periodically, as determined by operating conditions. The basket can be easily removed from the front for a quick clean-up.

The trimmer plate balances the flow for optimum effectiveness with more than one skimmer.




Key Features:

- White cyclac plastic construction.
- White plastic, natural bronze, or chrome finish faceplate available.
- Front-removable basket for cleaning.

#268-115 Surface Skimmer: 1-1/2" F.N.P.T. connection. White cyclac plastic faceplate.

#268-116 Surface Skimmer: Same as #268-115, except with natural finish bronze faceplate.

#268-117 Surface Skimmer: Same as #268-115, except with Chrome plated bronze faceplate.

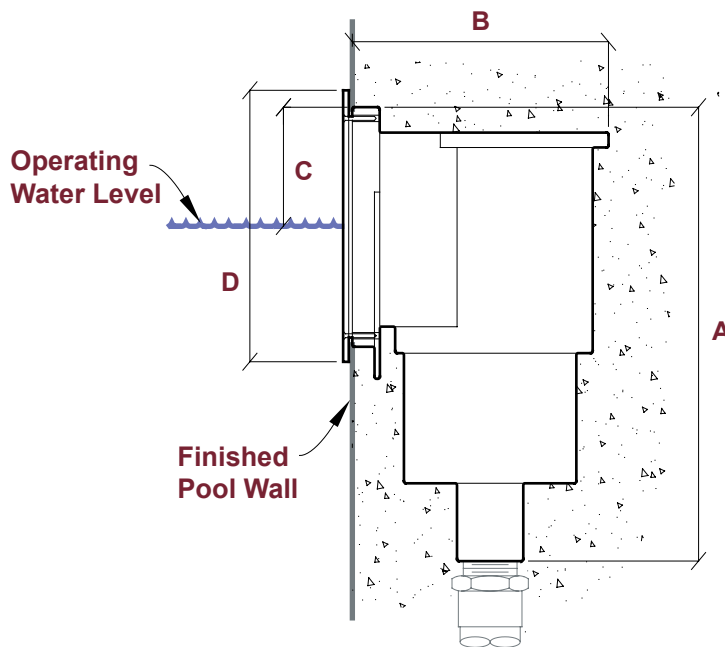

Model	Order #	Description	A	B	C	D	Shipping Weight
268-115	240-24145	Front Access Skimmer with White Cyclac Faceplate.	13-3/8"	9-1/16"	3-1/2"	8"	6.0 lbs
268-116	240-24146	Front Access Skimmer with Natural Bronze Faceplate.	13-3/8"	9-1/16"	3-1/2"	8"	7.0 lbs
268-117	240-24147	Front Access Skimmer with Chrome Plated Bronze Faceplate.	13-3/8"	9-1/16"	3-1/2"	8"	7.0 lbs

Toll Free: 887.426.4622
 Phone: 770.457.3000
 Fax: 770.457.4225
www.hobbsfountains.com