

464 Series

Into-Pool Conduit Assembly

Function:

The **464 Series Stainless Steel Into-Pool Conduit Assembly** provides a rigid, non-corrosive NPT conduit termination into pools, on which to mount submersible junction boxes and standard electrical fittings.

The in-slab main body provides a female threaded, noncorrosive penetration through the pool floor or wall, terminating flush with the water-side surface. The above-slab portion consists of a 3" long brass nipple, factory-installed into the coupling to be watertight.



Key Features:


- Non-corrosive stainless steel and brass construction.
- 3/4" to 2" sizes available.

#464-07 Into-Pool Conduit Assembly: 3/4" female NPT connection.

#464-10 Into-Pool Conduit Assembly: 1" female NPT connection.

#464-15 Into-Pool Conduit Assembly: 1 1/2" female NPT connection.

#464-20 Into-Pool Conduit Assembly: 2" female NPT connection.

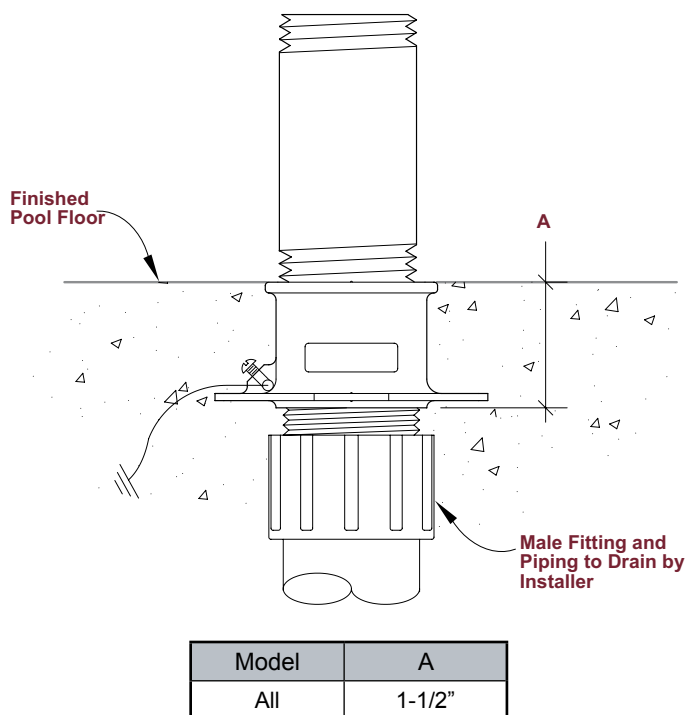

Model	Order #	Description	Shipping Weight
464-07	270-27594	3/4" SS Into-Pool Conduit Assembly with 3/4" Brass Nipple x 3" Long.	2.0 lbs
464-10	270-27595	1" SS Into-Pool Conduit Assembly with 1" Brass Nipple x 3" Long.	2.0 lbs
464-15	270-27596	1 1/2" SS Into-Pool Conduit Assembly with 1" Brass Nipple x 3" Long.	2.0 lbs
464-20	270-27597	2" SS Into-Pool Conduit Assembly with 1" Brass Nipple x 3" Long.	2.0 lbs