


265 Series

Inlet Fitting

Function:

The **265 Series Adjustable Inlet Fittings** are used when floor fittings are preferred instead of wall fittings. This fitting can be used as a return inlet with a flow rate of 35-40 GPM, in lieu of the 263- and 264-Series fittings. This fitting can also be used to drain an upper pool to a lower pool by piping to our 260-220 drain fitting in the lower pool.

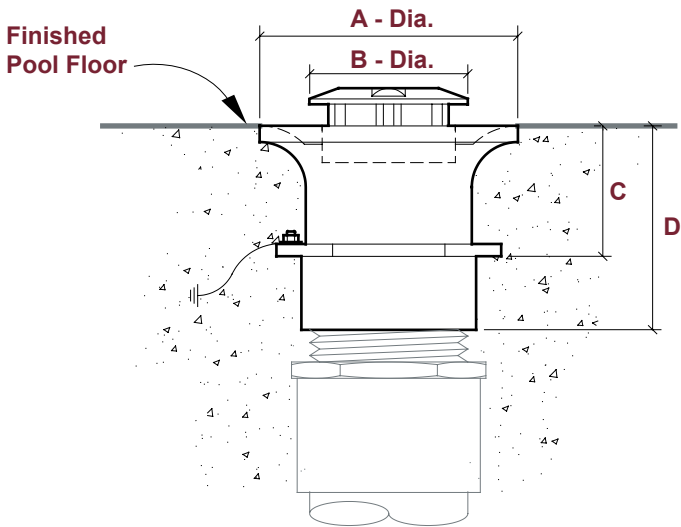

Key Features:

- Maximum flow of 35 GPM for 1-1/2" models and 40 GPM for 2" models.
- Cast brass, female NPT connection body with integral waterstop and bonding screw.
- O-ring sealed, vertically adjustable, brass deflection cap with adjustable 360° discharge pattern.
- Available in polished brass and chrome finishes.

#265-4842BSP Adjustable Inlet Fitting: Natural-finish cast brass; 1-1/2" FNPT connection. Maximum flow of 35 GPM is possible for discharge applications.

#265-4842BSPC Adjustable Inlet Fitting: Same as #264-4842ASP, except with chrome plated finish.

#265-4843BSP Adjustable Inlet Fitting: Natural-finish cast brass; 2" FNPT connection. Maximum flow of 40 GPM is possible for discharge applications.

#265-4843BSPC Adjustable Inlet Fitting: Same as #265-4843BSP, except with chrome plated finish.

Model	Order #	Description	A	B	C	D	Shipping Weight
265-4842BSP	240-24138	Adjustable Inlet Fitting; Brass Finish; 1-1/2" F.N.P.T. Connection.	3-7/8"	2-3/8"	2"	3-1/8"	6.0 lbs
265-4842BSPC	240-24139	Adjustable Inlet Fitting; Chrome Finish; 1-1/2" F.N.P.T. Connection.	3-7/8"	2-3/8"	2"	3-1/8"	6.0 lbs
265-4843BSP	240-24140	Adjustable Inlet Fitting; Brass Finish; 2" F.N.P.T. Connection.	3-7/8"	2-3/8"	2"	3-1/8"	7.0 lbs
264-4843ASPC	240-24141	Adjustable Inlet Fitting; Chrome Finish; 2" F.N.P.T. Connection.	3-7/8"	2-3/8"	2"	3-1/8"	7.0 lbs