




**Function:**

The **600e Silver Series Display System** is identical to the 600e Bronze Series underground vault display pump system with the exception of using schedule 80 PVC piping, fittings, and true union ball valves. It features high quality components and reliable construction all housed in a water tight, fiberglass vault with aluminum access hatch. This system provides one suction and one discharge for large spray effects and water fountains. *This system can only be housed in a 6PAK vault. (as shown)*

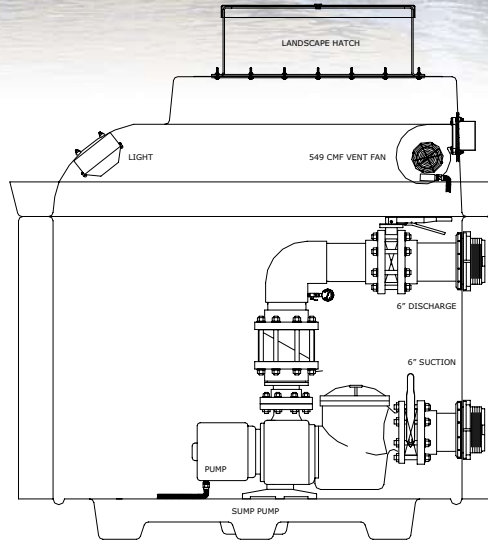

**600e Pump Options -**

- Hobbs 320-HP: 5 HP Centrifugal Pump. 3 phase power  
or
  - Hobbs 315-24: 5 through 20 HP Bronze Pump. 3 phase power
  - 208-230/460V available. Installer must provide additional 120V line for 460V systems
  - Basket strainer included
- Standard system includes selected PAK size, selected pump size, discharge assembly with 6" waffer-style check valve and infinite position butterfly valve, and suction assembly with a 6" 10 position butterfly valve. *NOTE: The 600e-051-3-S system has 4" discharge and suction assemblies.*
  - Bulkhead fittings are placed at suction and discharge points on PAK walls for installer piping to fountain.
  - Control panel requirements vary depending on pump selection. A control panel is required for all systems.

**PUMP INFORMATION:**

**5 HP; 3 Phase; 208-230/460V;**  
Delivers 195 GPM at 60 feet of head, 155 GPM at 80 feet of head, 100 GPM at 95 feet of head.

**5 HP; 3 Phase; 208-230/460V;**  
Delivers 350 GPM at 30 feet of head, 295 GPM at 50 feet of head, 205 GPM at 70 feet of head.

**7-1/2 HP; 3 Phase; 208-230/460V;**  
Delivers 503 GPM at 30 feet of head, 450 GPM at 50 feet of head, 370 GPM at 70 feet of head.

**10 HP; 3 Phase; 208-230/460V;**  
Delivers 625 GPM at 30 feet of head, 570 GPM at 50 feet of head, 375 GPM at 90 feet of head.

**15HP; 3 Phase; 208-230/460V;**  
Delivers 640 GPM at 50 feet of head, 590 GPM at 70 feet of head, 330 GPM at 120 feet of head.

**20 HP; 3 Phase; 208-230/460V;**  
Delivers 730 GPM at 50 feet of head, 690 GPM at 70 feet of head, 450 GPM at 120 feet of head.

Model	Order #	Description
600e-051-3-S	680-69757	Silver Series, 5 HP, 3φ, Display System for ePAK (Thermoplastic Pump) - 4" discharge / 4" suction
600e-050-3-S	680-69759	Silver Series, 5 HP, 3φ, Display System for ePAK (Bronze Pump) - 6" discharge / 6" suction
600e-075-3-S	680-69761	Silver Series, 7-1/2 HP, 3φ, Display System for ePAK (Bronze Pump) - 6" discharge / 6" suction
600e-100-3-S	680-69763	Silver Series, 10 HP, 3φ, Display System for ePAK (Bronze Pump) - 6" discharge / 6" suction
600e-150-3-S	680-69765	Silver Series, 15 HP, 3φ, Display System for ePAK (Bronze Pump) - 6" discharge / 6" suction
600e-200-3-S	680-69767	Silver Series, 20 HP, 3φ, Display System for ePAK (Bronze Pump) - 6" discharge / 6" suction
<b>Optional Equipment</b>		
700e-BS	680-69620	3/4" Fill / Level Manifold Assembly