




**Function:**

The **600e Bronze Series Display System** is our most economical underground vault display pump system available. Made using schedule 40 PVC piping and fittings where possible, it features high quality components and reliable construction all housed in a water tight, fiberglass vault with aluminum access hatch. This system provides one suction and one discharge for large spray effects and water fountains. *This system can only be housed in a 6PAK vault. (as shown)*

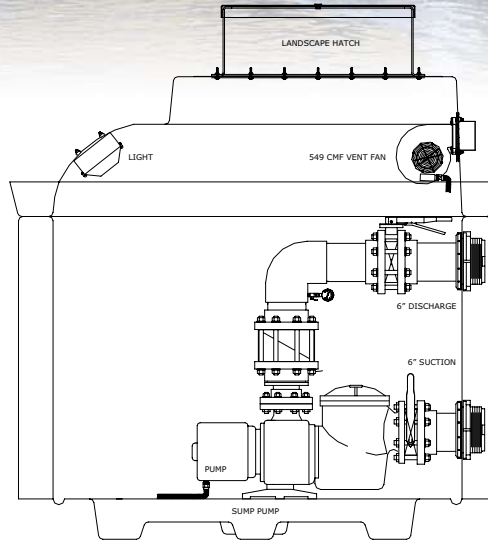

**600e Pump Options -**

- Hobbs 320-HP: 5 HP Centrifugal Pump. 3 phase power  
or
- Hobbs 315-24: 5 through 20 HP Bronze Pump. 3 phase power
- 208-230/460V available. Installer must provide additional 120V line for 460V systems
- Basket strainer included
  
- Standard system includes selected PAK size, selected pump size, discharge assembly with 6" waffer-style check valve and infinite position butterfly valve, and suction assembly with a 6" 10 position butterfly valve. *NOTE: The 600e-051-3-B system has 4" discharge and suction assemblies.*
  
- Bulkhead fittings are placed at suction and discharge points on PAK walls for installer piping to fountain.
  
- Control panel requirements vary depending on pump selection. A control panel is required for all systems.

**PUMP INFORMATION:**

**5 HP; 3 Phase; 208-230/460V;**  
Delivers 195 GPM at 60 feet of head, 155 GPM at 80 feet of head, 100 GPM at 95 feet of head.

**5 HP; 3 Phase; 208-230/460V;**  
Delivers 350 GPM at 30 feet of head, 295 GPM at 50 feet of head, 205 GPM at 70 feet of head.

**7-1/2 HP; 3 Phase; 208-230/460V;**  
Delivers 503 GPM at 30 feet of head, 450 GPM at 50 feet of head, 370 GPM at 70 feet of head.

**10 HP; 3 Phase; 208-230/460V;**  
Delivers 625 GPM at 30 feet of head, 570 GPM at 50 feet of head, 375 GPM at 90 feet of head.

**15HP; 3 Phase; 208-230/460V;**  
Delivers 640 GPM at 50 feet of head, 590 GPM at 70 feet of head, 330 GPM at 120 feet of head.

**20 HP; 3 Phase; 208-230/460V;**  
Delivers 730 GPM at 50 feet of head, 690 GPM at 70 feet of head, 450 GPM at 120 feet of head.

Model	Order #	Description
600e-051-3-B	680-69756	Bronze Series, 5 HP, 3φ, Display System for ePAK (Thermoplastic Pump) - 4" discharge / 4" suction
600e-050-3-B	680-69758	Bronze Series, 5 HP, 3φ, Display System for ePAK (Bronze Pump) - 6" discharge / 6" suction
600e-075-3-B	680-69760	Bronze Series, 7-1/2 HP, 3φ, Display System for ePAK (Bronze Pump) - 6" discharge / 6" suction
600e-100-3-B	680-69762	Bronze Series, 10 HP, 3φ, Display System for ePAK (Bronze Pump) - 6" discharge / 6" suction
600e-150-3-B	680-69764	Bronze Series, 15 HP, 3φ, Display System for ePAK (Bronze Pump) - 6" discharge / 6" suction
600e-200-3-B	680-69766	Bronze Series, 20 HP, 3φ, Display System for ePAK (Bronze Pump) - 6" discharge / 6" suction
<b>Optional Equipment</b>		
700e-BS	680-69620	3/4" Fill / Level Manifold Assembly