
## **Function:**

The **141 Series Clearstream Jets** produce smooth, clear, non-aerated streams of water. These jets are typically used to create the delicate water patterns seen on applications such as Spray Rings, Spray Arcs, Spray Bars, Rippler Rings, Rippler Arcs, and Rippler Bars.

Clearstream Jets are effective in any daylight setting and display well at night when accented with underwater lighting.



Size	А	В			
All	2-3/8"	1-3/4"			

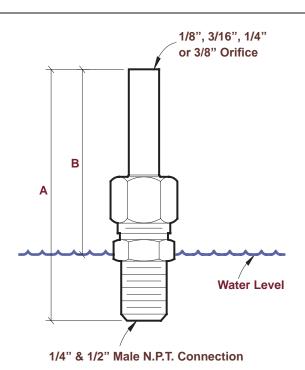

## **Key Features:**

- 1/4" male NPT inlet.
- Four orifice sizes available: 1/8", 3/16", 1/4" & 3/8".
- Adjustable to 15 degrees off vertical.
- Machined from high quality, noncorrosive brass.
- Suction screening or 100% filtration required.
- Water level independent.



## **Clearstream Jet**

**#141-1225 Clearstream Jet:** 1/8" orifice, 1/4" male NPT connection.

**#141-1825 Clearstream Jet:** 3/16" orifice, 1/4" male NPT connection.

**#141-2525 Clearstream Jet:** 1/4" orifice, 1/4" male NPT connection.

**#141-3750 Clearstream Jet:** 3/8" orifice, 1/2" male NPT connection.



Model	Order # 200-	Flow Volume	Spray Height							Shipping Weight					
			1'	2'	3'	4'	5'	6'	7'	8'	9'	10'	12'	14'	
141- 1225	20005	GPM	.30	.43	.52	.60	.67	.74	.80	.85	.90	.95			
141- 1825	20006	GPM	.7	1.0	1.2	1.4	1.5	1.7	1.8	1.9	2.0	2.2	2.4		
141- 2525	20007	GPM	1.2	1.7	2.1	2.4	2.7	3.0	3.2	3.4	3.6	3.8	4.2	4.5	.3 lbs
141- 3750	20031	GPM	2.4	3.5	4.3	5.1	5.8	6.3	6.9	7.4	7.8	8.3	10.2	11.8	
All M	odels	Head (ft)	1.4	2.8	4.2	5.6	7.0	8.4	9.8	11.2	12.6	14.0	16.8	19.6	

Toll Free: 1.877.426.4622 Phone: 770.457.3000 Fax: 770.457.4225 www.hobbsfountains.com